






JF P/N	CURRENT RATING(A)	HOUSING COLOR	DIM "L"	DIM "W"
ATIS-30A-h-36	30	PINK	36.0±0.5	5.4±0.2
ATIS-40A-h-36	40	GREEN		
ATIS-50A-h-36	50	RED		
ATIS-60A-h-36	60	YELLOW		
ATIS-70A-h-36	70	BROWN		
ATIS-80A-h-36	80	BLACK		
ATIS-100A-h-36	100	BLUE		
ATIS-120A-h-36	120	WHITE		
ATIS-140A-h-36	140	REDDISH BROWN	31.3±0.5	6.5±0.2
ATIS-30A-h-31.3	30	PINK		
ATIS-40A-h-31.3	40	GREEN		
ATIS-50A-h-31.3	50	RED		
ATIS-60A-h-31.3	60	YELLOW		
ATIS-70A-h-31.3	70	BROWN		
ATIS-80A-h-31.3	80	BLACK		
ATIS-100A-h-31.3	100	BLUE		
ATIS-120A-h-31.3	120	WHITE		
ATIS-140A-h-31.3	140	REDDISH BROWN		

Notes:

- Voltage Rating: 32V DC
- Interrupting Rating: 1000A @ 32 VDC
- Operating temperature range: -40°C to +125°C
- Body Material: a.PA66 GF33(30~70A)
b.PET GF30(80~140A)
- Cap Material: a.PC / Transparent(30~70A)
b.PES / Transparent(80~140A)
- Contacts Material: Copper Alloy
- Recommended Mounting Torque :
36 : M6 (stud ` washer ` nut): 6.0 Nm +/- 1Nm
31.3 : M5 (stud ` washer ` nut): 4.5 Nm +/- 1Nm
- RoHS Compliant

Electrical Characteristics Test According to ISO 8820-4

% Of Rated Current	Operating Time (s)	
	MIN.	MAX.
110	14,400	-
200	5	100
350	0.2	7
600	0.04	1

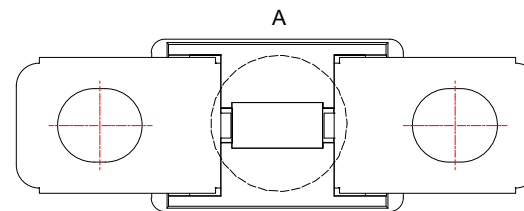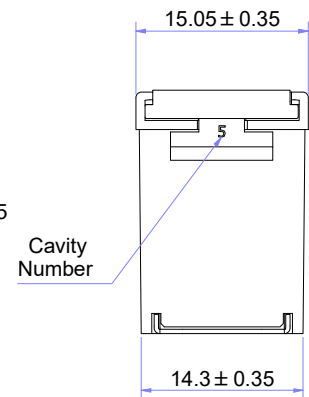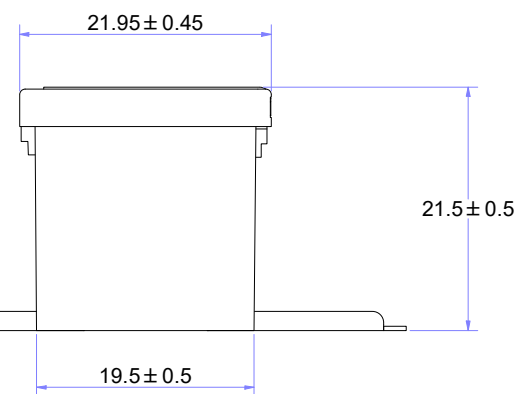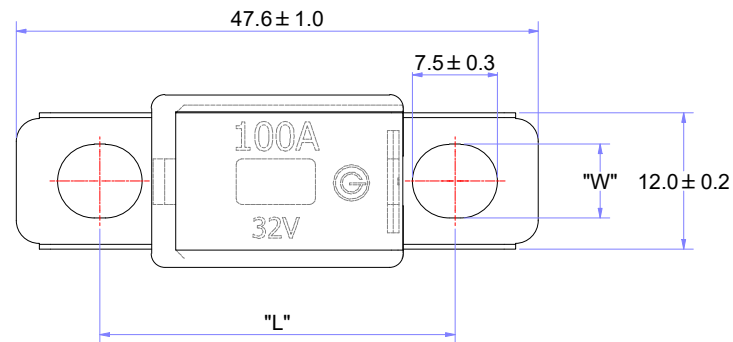

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN mm TOLERANCE DECIMALS ANGULAR X±0.5 ±2 ° XX±0.25		CUSTOMER NO.	JENN FENG ELECTRIC INDUSTRIAL CO., LTD.
		DRAWN BY James	
		CHECKED BY	
DO NOT SCALE DRAWING THIRD ANGLE PROJECTION 		APPROVED BY 林進有	TITLE Fuse Link with Bolt-in Contacts
		DATE 2024/6/20	
P/N	A	PART NO. ATIS-h SERIES	DRAWING NO. BA24062002
REV		SCALE	