

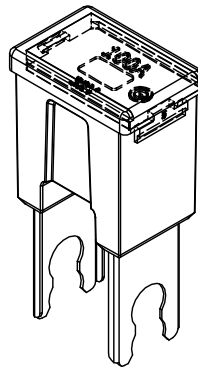



Part Number	Current Rating(A)	Body Color
ATK-B1-20A(Y)	20	Light-Blue
ATK-B1-30A(Y)	30	Pink
ATK-B1-40A(Y)	40	Green
ATK-B1-50A(Y)	50	Red
ATK-B1-60A(Y)	60	Yellow
ATK-B1-70A(Y)	70	Brown
ATK-B1-80A(Y)	80	Black
ATK-B1-100A(Y)	100	Blue
ATK-B1-120A(Y)	120	White

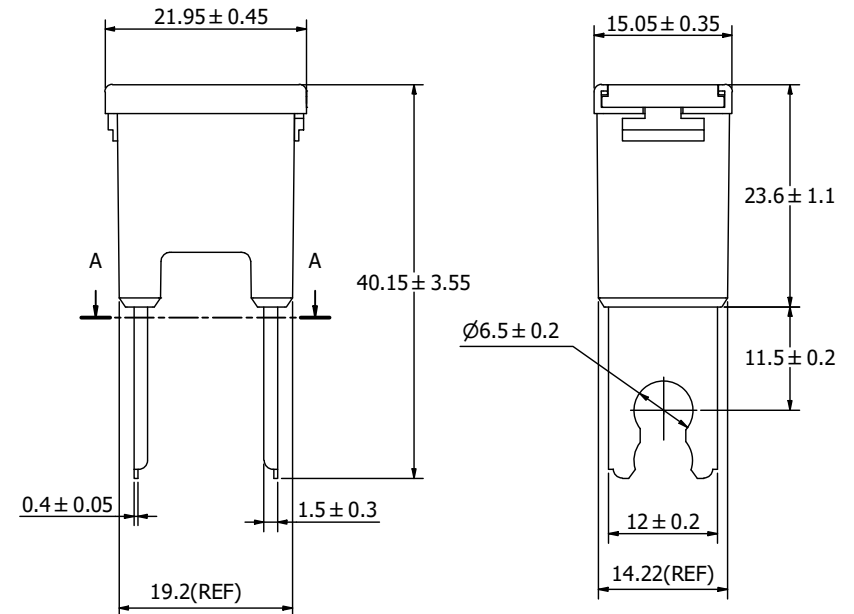

SECTION A-A



Notes:

- 1.Voltage Rating: 32V DC
- 2.Interrupting Rating: 1000A @ 32 VDC
- 3.Operating temperature range: -40°C to +125°C
- 4.Body Material: PA66-GF33
- 5.Cap Material: PC / Transparent
- 6.Contacts Material: Copper Alloy
- 7.Ceramic Material: Porcelain / White
- 8.Fuse Mounting: M6 Threaded Stud And Hex Nuts
Recommended Torque: 6.0 ± 1.0 Nm
- 9.RoHS Compliant

Electrical Characteristics Test
According to ISO 8820-4

% Of Rated Current	Operating Time (s)	
	Min	Max
110	14,400	-
200	5	100
350	0.2	7
600	0.04	1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN mm TOLERANCE DECIMALS ANGULAR X± 0.5 ± 2° XX± 0.25 DO NOT SCALE DRAWING		CUSTOMER NO.	JENN FENG ELECTRIC INDUSTRIAL CO., LTD. TITLE ATK Bolt-in Fuse Link Type B1 PART NO. ATK-B1-XXX(Y) Series DRAWING NO. BA10102701
		DRAWN BY Belliel	
		CHECKED BY 林進有	
		APPROVED BY 楊肇元	
P/N		DATE 2020.08.07	
REV	D	SCALE	