


Part Number	Current Rating (A)	Body Color
ATH-A2-20A	20	Light-Blue
ATH-A2-30A	30	Pink
ATH-A2-40A	40	Green
ATH-A2-50A	50	Red
ATH-A2-60A	60	Yellow
ATH-A2-70A	70	Brown
ATH-A2-80A	80	Black
ATH-A2-100A	100	Blue

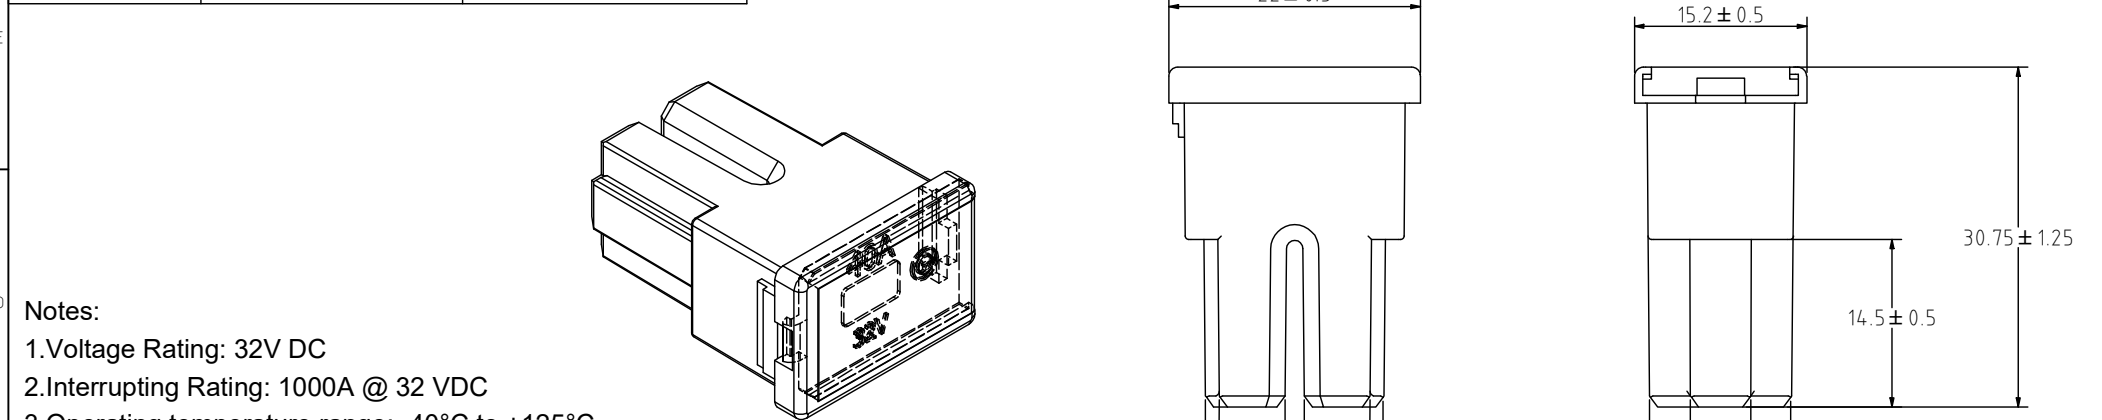

Notes:	
1.Voltage Rating: 32V DC	
2.Interrupting Rating: 1000A @ 32 VDC	
3.Operating temperature range: -40°C to +125°C	
4.Body Material: PA66 GF33%	
5.Cap Material: PC / Transparent	
6.Contacts Material: Copper Alloy	
7.PAL Fuse Assy To Holder Force(Terminals thickness:0.8mm)	
Insertion Force: 6Kgf Max.	
Extraction Force: 1Kgf Min.	
8.RoHS Compliant	

Electrical Characteristics Test	
According to ISO 8820-4	

% Of Rated Current	Clearing Time (s)	
	Min	Max
110	14,400	----
200	5	100
350	0.2	7
600	0.04	1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN mm TOLERANCE		CUSTOMER NO.	JENN FENG ELECTRIC INDUSTRIAL CO., LTD.
DECIMALS	ANGULAR	DRAWN BY Belliel	
X±0.25	±2	CHECKED BY 林進有	TITLE FUSE LINK WITH FEMALE CONTACTS
XX±0.13		APPROVED BY 楊肇元	
DO NOT SCALE DRAWING		DATE 2020.08.07	PART NO. ATH-A2-XXX Series
P/N		SCALE	DRAWING NO. BA04112901
REV	C		